


PARAMETERS

Impedance	8 ohms
Re	5.5 ohms
Le	1.68 mH
Fs	39 Hz
Qms	8.85
Qes	0.30
Qts	0.29
Mms	72.8g
Cms	0.23 mm/N
Sd	530.9 cm ²
Vd	265.5 cm ³
BL	18 Tm
Vas	91.8 liters
Xmax	5.0 mm
VC Diameter	76 mm
SPL	96.1 dB @ 2.83V/1m
RMS Power Handling	450 watts
Usable Frequency Range (Hz)	44 - 4,000 Hz


FEATURES

- Strong, low-mass carbon fiber impregnated paper cone
- I-beam rolled edge 1.2 mm steel frame
- Low distortion motor system w/copper cap
- Powerful 80 oz. ceramic ferrite magnet
- Vented pole piece/vented voice coil gap improve thermal management

IMPEDANCE/PHASE

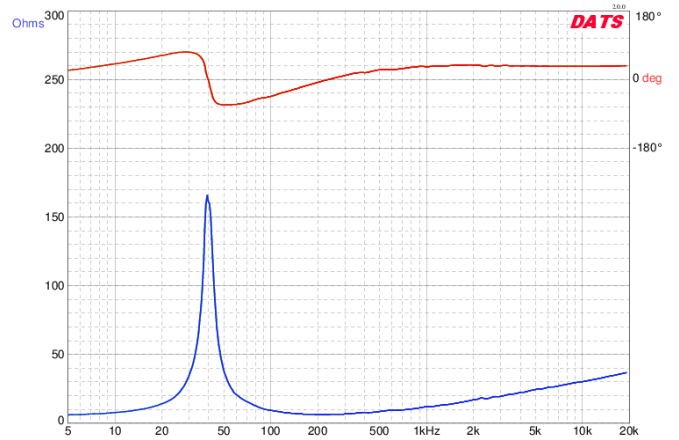

FREQUENCY RESPONSE

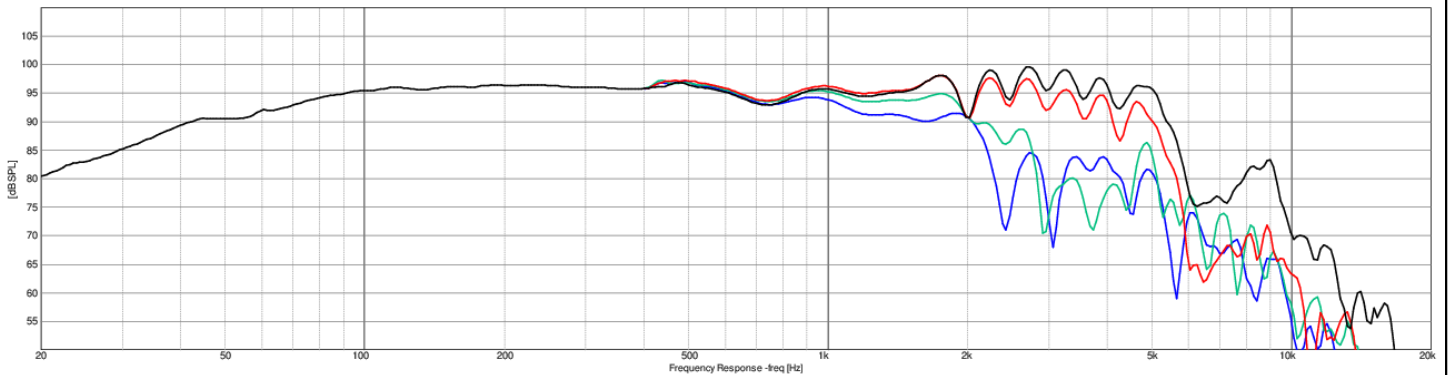

Note: 1/24th octave smoothing - nearfield response included in graph below 450 Hz.

Black = 0°
Red = 15°
Green = 30°
Blue = 45°