

andio

MODEL: HN8 Product id: HN8D412

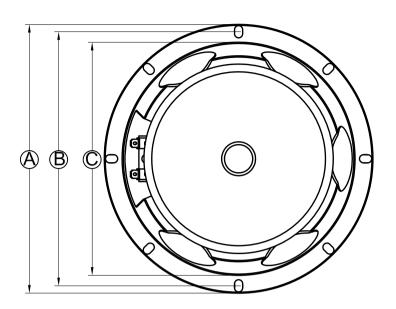

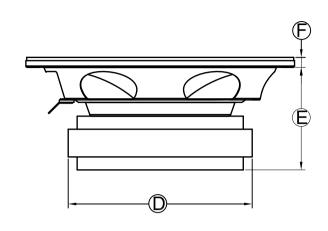

Α	Ø209
В	Ø196
C	Ø179

D	Ø134
E	61
F	8

200 W AES

Power handling*: Sensitivity: 98,7 dB Nominal impedance: 4Ω 2 mm Equivalent Compliance (Vas): 7,2 L Free Air Resonance (Fs): 89,7 Hz 0,48

Electrical "Q" (Qes):
Mechanical "Q" (Qms):
Total Speaker "Q" (Qts): 4,7 0,43 DC Resistance (Re): 3Ω Magnet weigth (Oz): 35 Oz

² andio


www.b2-audio.com / www.b2audio.com Sales & Marketing: bh@b2-audio.com Technical support: bm@b2-audio.com General requests: b2audio@hotmail.com


www.facebook.com/b2audio

*It's essential that our speakers are given time to allow the suspension to soften up. Depending on usage, this may take several weeks. While this process is undergoing, it is not recommended to apply full amplification power according to the speakers specs. Once the moving parts have been broken in, the performance of your speaker will increase.

B² audio

MODEL: HNTT Product id: HNTT412

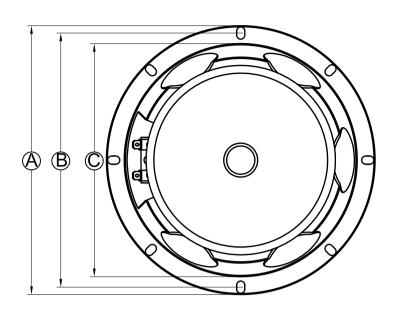

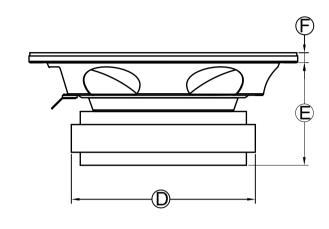

Α	Ø 97,9
В	
С	Ø 85,5

О	Ø 69,5
Ш	28
T	

Power handling*:

Frequency response:

Sensitivity:

Nominal impedance: DC Resistance (RE): Voice coil diameter: 30 / 120 w

2 Khz \sim 20 KHz

106 dB

 4Ω

 3.9Ω

1"

 B^2 and io

www.b2-audio.com / www.b2audio.com Sales & Marketing: bh@b2-audio.com Technical support: bm@b2-audio.com General requests: b2audio@hotmail.com

www.facebook.com/b2audio