



OWNER'S MANUAL

SLI 2.2 - SLI 4.2

CONVECTION



REFERENCE
PERFORMANCE

connection.eu


WARNING

- Before you start your installation, make sure you carefully read and understand all instructions. Disregarding them might cause accidental harms or damage your devices.
- The vehicle electric system must have 12 VDC voltage with negative to ground. Make sure your car has it in order to avoid any damages to your amplifier and to the vehicle.
- Install the device in the vehicle parts where temperature is between 0° C (32° F) and 55° C (131° F).
- Make sure the location you chose for the components does not affect the correct functioning of the vehicle mechanical and electric devices.
- Do not run the cables or install the device next to electronic gearcases.
- Always wear protective eyewear when using tools that may generate splinters.
- When installation is over, and before plugging the main power supply fuse, check the system wiring and make sure all connections were done in the right way.
- Safety must be at the first place while driving. Listening volume must never cover noise coming from the outside and from the vehicle, in order for you to be able to promptly face emergency situation.
- Always insulate the connection between the SLI and the OEM headunit / OEM amplifier to avoid damage them.
- Always insulate the connection between the SLI and the +12V power supply system (battery).
- Always fuse +12 V SLI cable (RED) with 1A fuse to avoid any damage to the vehicle electrical system and or event of fire.


Elettromedia will not be liable for the direct or indirect damages due to a wrong use or a wrong connection of the device.

PACKAGING CONTENTS

SLI 2.2

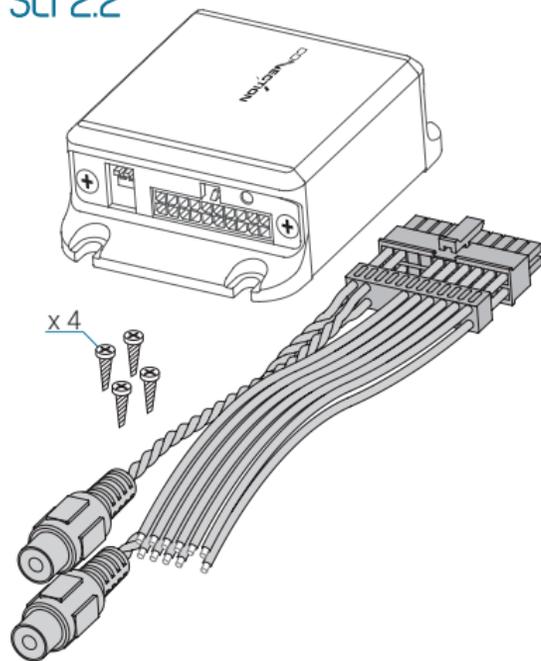


SLI 4.2

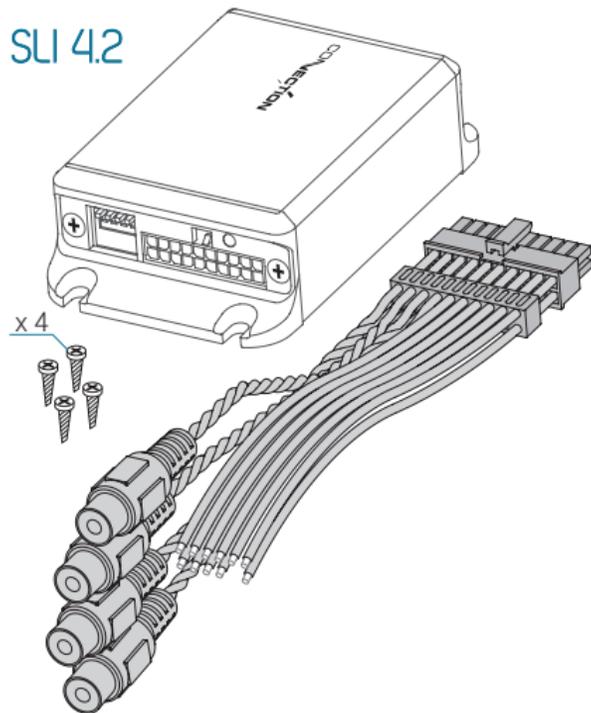

INSTALLATION - FIXING - SIZE

SLI 2.2 - SLI 4.2

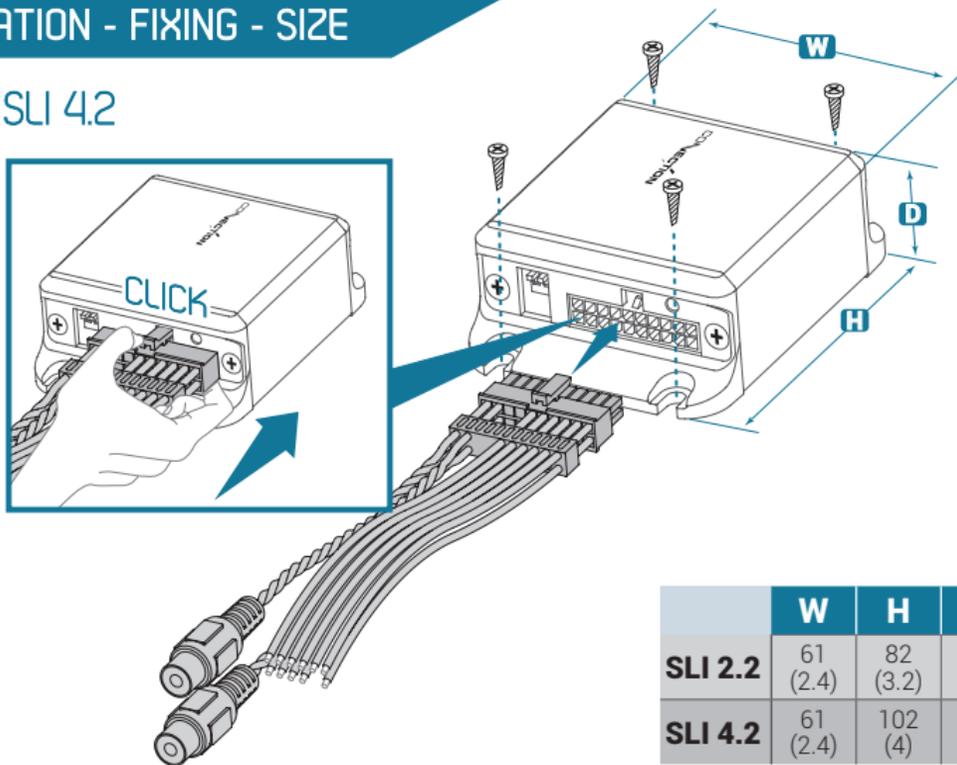


	W	H	D	
SLI 2.2	61 (2.4)	82 (3.2)	28 (1.1)	mm (in.)
SLI 4.2	61 (2.4)	102 (4)	28 (1.1)	mm (in.)

CONNECTIONS

SLI 2.2



**UNIVERSAL SPEAKERS
SIMULATOR** circuit, simulates
the load of the OEM speakers
on the 4 Front + Rear input
channels, for a complete
compatibility with OEM
Headunit / OEM Amplifier.

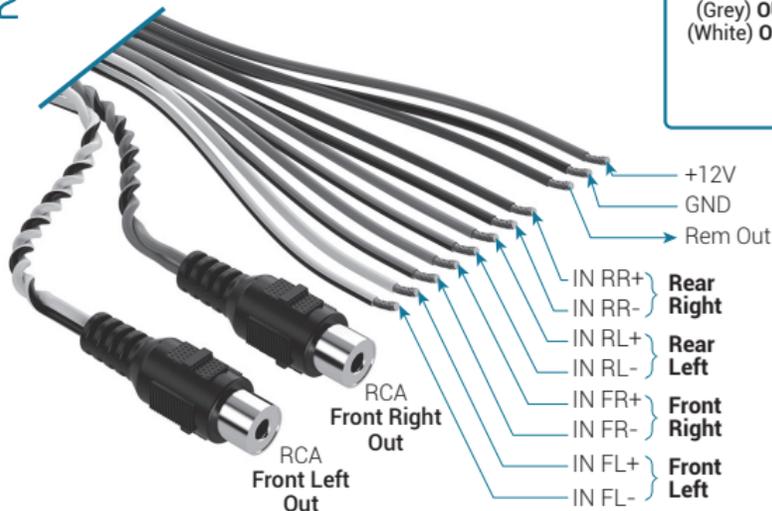

SLI 2.2 CABLE OUTPUT VIEW

(Red) +12V	● ●	GND (Black)
(Blue) REM OUT	● □	NC
(Purple) IN RR+	● ●	IN RR- (Purple/Black)
(Green) IN RL+	● ●	IN RL- (Green/Black)
(Grey) IN FR+	● ●	IN FR- (Grey/Black)
(White) IN FL+	● ●	IN FL- (White/Black)
NC	□ □	NC
NC	□ □	NC
(Grey) OUT FR+	□ □	OUT FR- (Grey/Black)
(White) OUT FL+	□ □	OUT FL- (White/Black)
		RCA OUT


*Conversion not operated for Rear input channels on SLI2.2, only USS and ART function is active on these inputs.

CONNECTIONS

SLI 4.2



**UNIVERSAL SPEAKERS
SIMULATOR** circuit, simulates
the load of the OEM speakers
on the 4 Front + Rear input
channels, for a complete
compatibility with OEM
Headunit / OEM Amplifier.

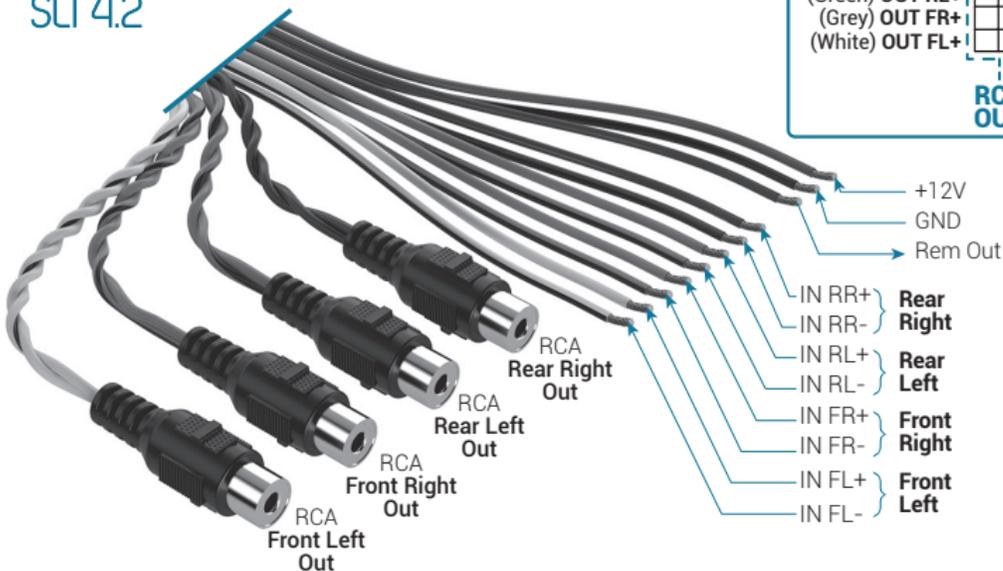


SLI 4.2 CABLE OUTPUT VIEW



(Red) +12V	● ●	GND (Black)
(Blue) REM OUT	● □	NC
(Purple) IN RR+	● ●	IN RR- (Purple/Black)
(Green) IN RL+	● ●	IN RL- (Green/Black)
(Grey) IN FR+	● ●	IN FR- (Grey/Black)
(White) IN FL+	● ●	IN FL- (White/Black)
(Purple) OUT RR+	□ □	OUT RR- (Purple/Black)
(Green) OUT RL+	□ □	OUT RL- (Green/Black)
(Grey) OUT FR+	□ □	OUT FR- (Grey/Black)
(White) OUT FL+	□ □	OUT FL- (White/Black)

**RCA
OUT**

CONNECTIONS: SLI 2.2 with OEM Headunit (without ART™ function)

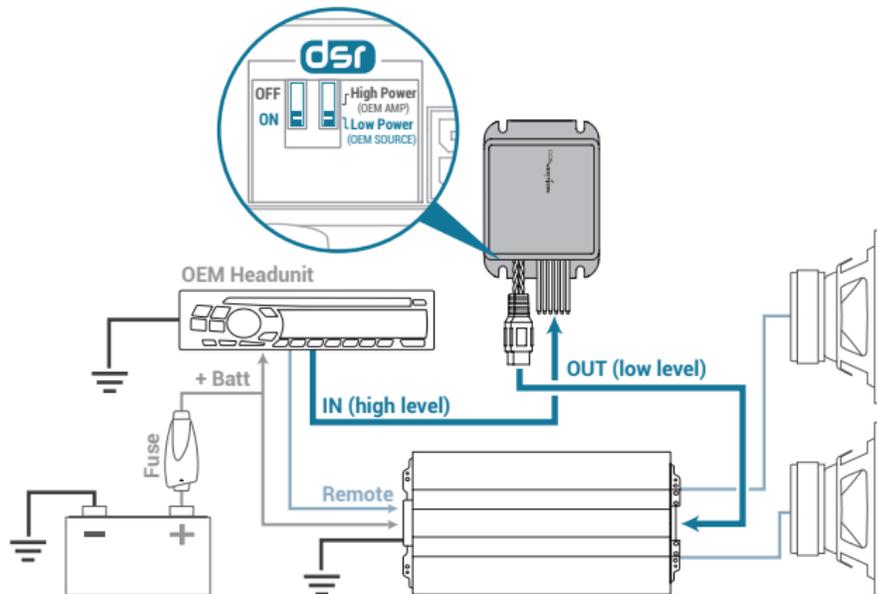

CONNECTIONS: SLI 2.2 with OEM Headunit (with ART™ function)

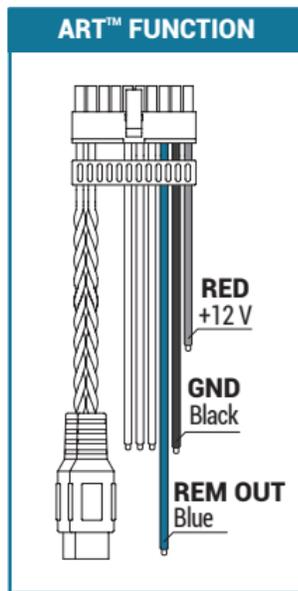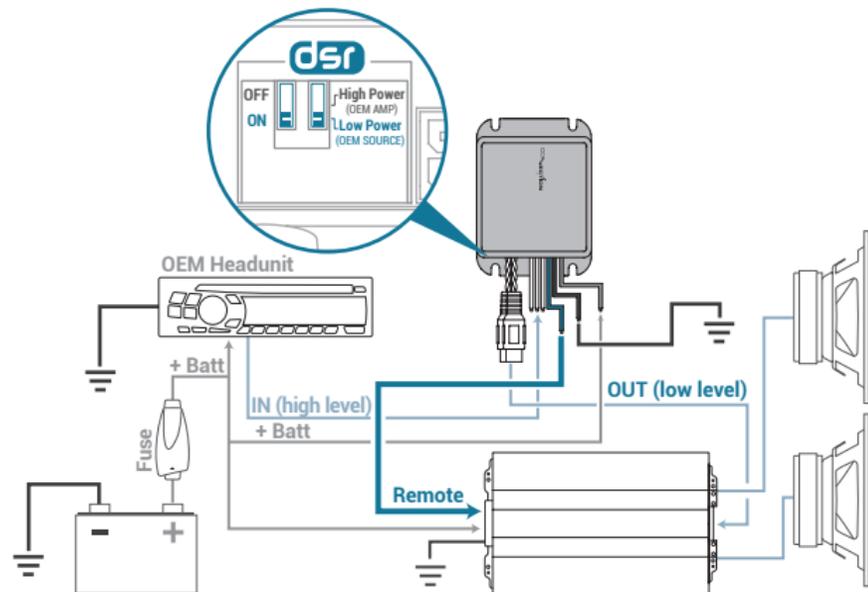


DSR: DOUBLE STEP-DOWN RATIO, allows correct level interfacing with OEM Headunit or OEM Amplifier by switch selection.

ART™: AUTOMATIC REMOTE TURN-ON/OFF function, generates a 12 V remote output when the OEM Headunit / Amplifier is turned ON/OFF (available only when SLI is powered).

*Conversion not operated for Rear input channels on SLI2.2, only USS and ART function is active on these inputs.


**In countries where the legislation on electromagnetic compatibility is not mandatory under ECE / UN Regulation no. 10/5.

CONNECTIONS: SLI 4.2 with OEM Headunit (without ART™ function)

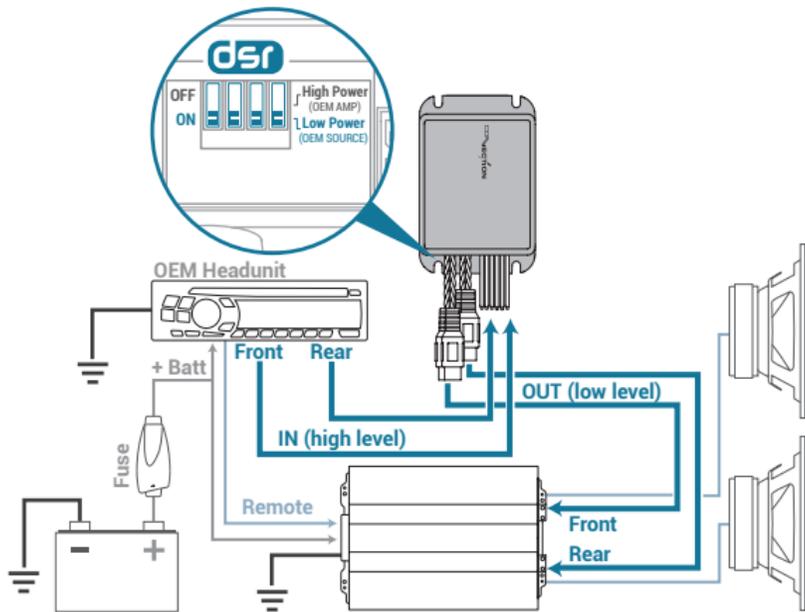

DSR: DOUBLE STEP-DOWN RATIO, allows correct level interfacing with OEM Headunit or OEM Amplifier by switch selection.

CONNECTIONS: SLI 4.2 with OEM Headunit (with ART™ function)


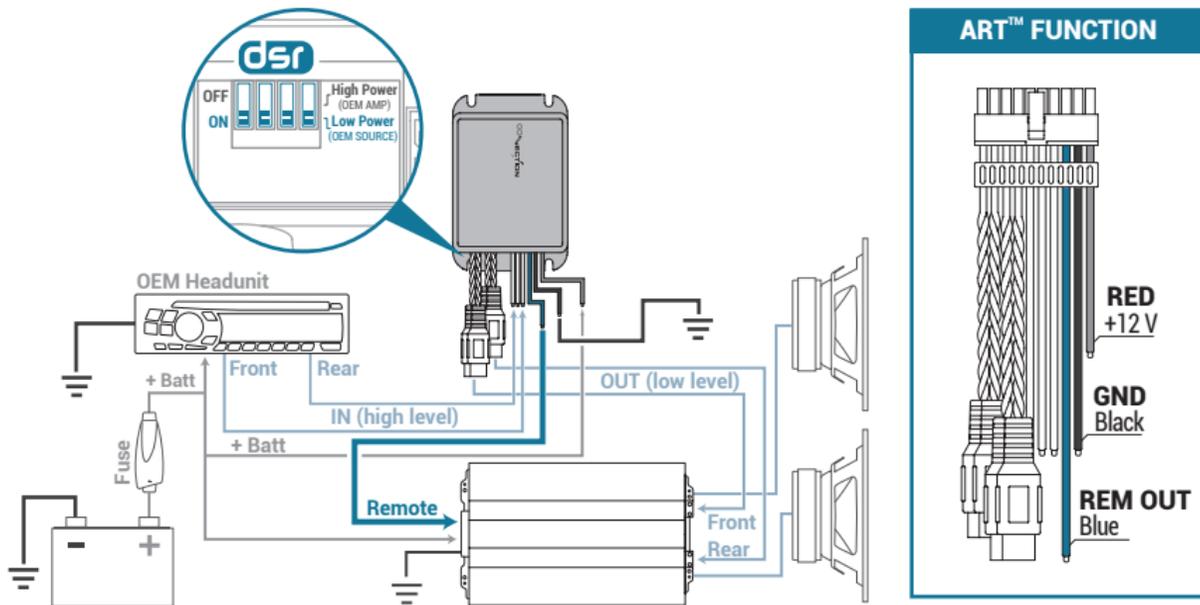


DSR: DOUBLE STEP-DOWN RATIO, allows correct level interfacing with OEM Headunit or OEM Amplifier by switch selection.

ART™: AUTOMATIC REMOTE TURN-ON/OFF function, generates a 12 V remote output when the OEM Headunit / Amplifier is turned ON/OFF (available only when SLI is powered).

**In countries where the legislation on electromagnetic compatibility is not mandatory under ECE / UN Regulation no. 10/5.

CONNECTIONS: SLI 2.2 with OEM Amplifier (with ART™ function)

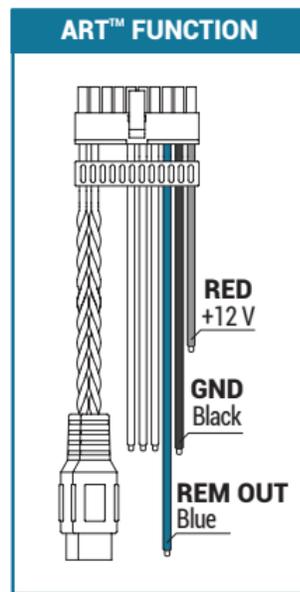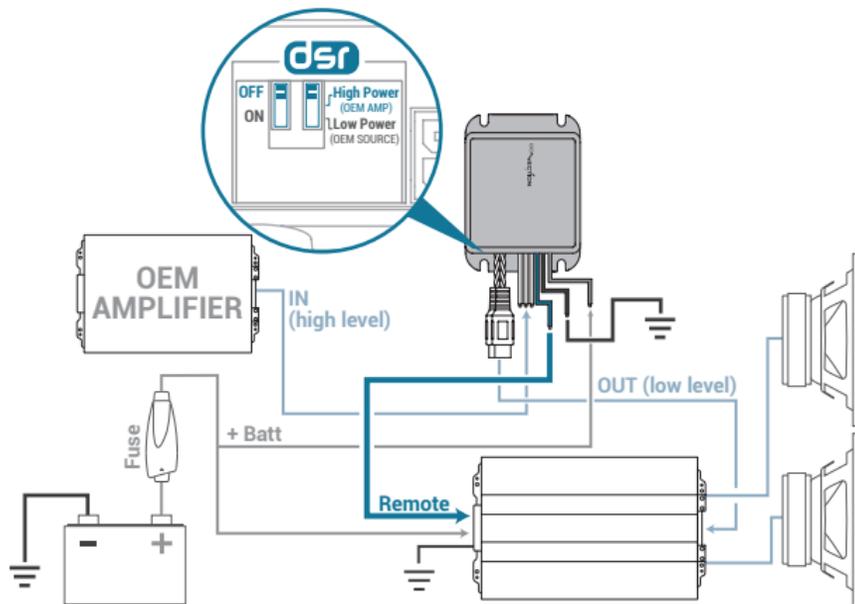



DSR: DOUBLE STEP-DOWN RATIO, allows correct level interfacing with OEM Headunit or OEM Amplifier by switch selection.

ART™: AUTOMATIC REMOTE TURN-ON/OFF function, generates a 12 V remote output when the OEM Headunit / Amplifier is turned ON/OFF (available only when SLI is powered).

*Conversion not operated for Rear input channels on SLI2.2, only USS and ART function is active on these inputs.

**In countries where the legislation on electromagnetic compatibility is not mandatory under ECE / UN Regulation no. 10/5.

CONNECTIONS: SLI 4.2 with OEM Amplifier (with ART™ function)

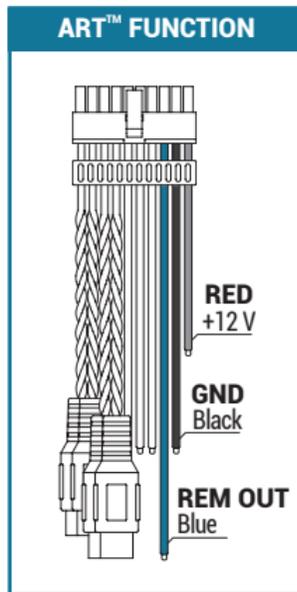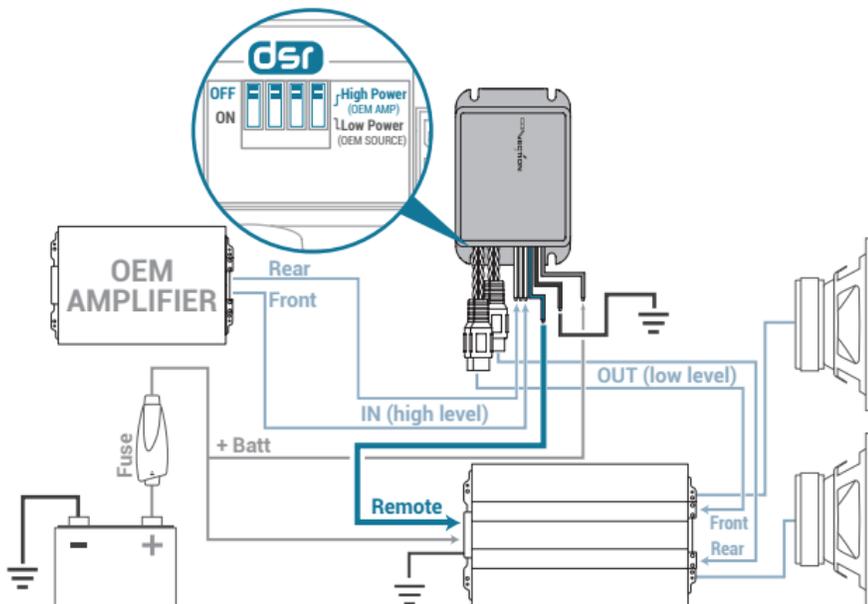

DSR: DOUBLE STEP-DOWN RATIO, allows correct level interfacing with OEM Headunit or OEM Amplifier by switch selection.

ART™: AUTOMATIC REMOTE TURN-ON/OFF function, generates a 12 V remote output when the OEM Headunit / Amplifier is turned ON/OFF (available only when SLI is powered).

**In countries where the legislation on electromagnetic compatibility is not mandatory under ECE / UN Regulation no. 10/5.

TECHNICAL SPECIFICATIONS

	SLI 2.2	SLI 4.2
Input / Output Channels	4*/2	4/4
Maximum Input Power	50W@4Ω (Lo-Power) / 150W@4Ω (Hi-Power)	
Nominal Conversion Ratio	4:1 Lo-Power / 8:1 Hi-Power	
Input Impedance**	200 Ω	
Output Impedance	400 Ω	
Distortion (THD+N@25W rms input, Lo-Power)	0,15% 100 Hz, 0,07% 1 kHz, 0,07% 10 kHz	
Frequency Response (-3dB)	15 ÷ 40 kHz	
Remote Out*** (Only when LSI is Powered)	12 VDC - 100mA max @ 13 VDC input	
Weight (kg. / lb.) including cable	0,16 (0.36)	0,25 (0.55)

*Conversion not operated for Rear input channels on SLI2.2, only USS and ART function is active on these inputs.

**Input impedance when the USS function is Off.

***In countries where the legislation on electromagnetic compatibility is not mandatory under ECE / UN Regulation no. 10/5.



WARRANTY

The products are guaranteed according to the laws in force.
Possible damaged products must be sent back, with authorization, to CONNECTION dealer to be repaired or replaced.
Products damaged by incorrect use/installation are not covered by warranty.

INFO

In Italy: supporto.tecnico@elettromedia.it
Abroad: support@elettromedia.it