

**Parameters**


Impedance ( $\Omega$ )	4
Re ( $\Omega$ )	3.2
Le (mH) @ 1 kHz	3.1
Fs (Hz)	28.25
Qms	5.97
Qes	0.49
Qts	0.45
Mms (g)	173.1
Cms (mm/N)	0.18
Sd (cm <sup>2</sup> )	498
Vd (cm <sup>3</sup> )	946.2
BL (Tm)	14.3
Vas (liters)	64.1
Xmax (mm)	19
VC Diameter (mm)	64
SPL (dB@1W/1m)	86.6
RMS Power Handling (W)	500
Usable Frequency Range (Hz)	24 - 500

**Features**

- 12" Kevlar-reinforced cone
- 2-1/2" edgewound voice coil
- Santoprene rubber surround
- Double high-grade ferrite magnets
- Rigid 12-spoke cast frame
- Optimized motor structure
- Made in the USA

Note: All dimensions in mm.

**Frequency Response**

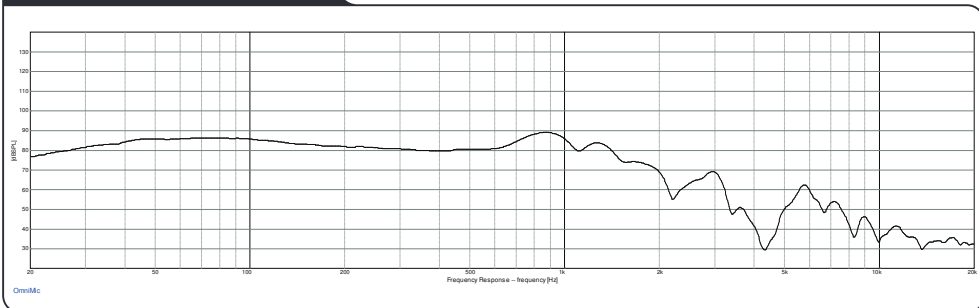

**Impedance/Phase**

