


## **KEY FEATURES**


- 1.75" Voice coil
- · 80 Watts continuos power handling
- 109 dB Sensitivity
- High gradeTitanium Diaphragm

Exit Throat Diameter	1" (25.4mm)
Nominal Impedance	8 Ohms
Rated Power Handling	80 Watts
Program Power	160 Watts
Sensitivity 2.83V at 1m*	109 dB
Recommended High Pass Crossover** **for Full Power Handling	1800 Hz*** ***12 db/oct Crossover
Frequency Response at -10dB	1,300-20,000Hz
Frequency Response at -10dB Voice Coil Diameter	<b>1,300-20,000Hz</b> 1.75"(44.4 mm)
. , .	
Voice Coil Diameter	1.75"(44.4 mm)
Voice Coil Diameter Voice Coil Wire	1.75"(44.4 mm) CCAW
Voice Coil Diameter Voice Coil Wire Voice Coil Former Material	1.75"(44.4 mm) CCAW Kapton <sup>®</sup>



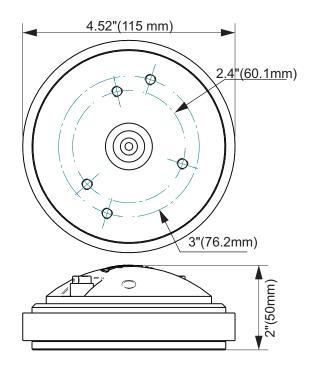

## Frequency Response Measured at 2.83v/1m



## \*Frequency Response Measured on WG14-25

 PRV AUDIO USA (USA and Export)
 PRV AUDIO BRAZIL (Brazilian Sales Only)

 FORT LAUDERDALE, FL
 SAO LEOPOLDO, RS

 support@prvaudio.com
 vendas@pvaudio.com.br

 www.prvaudio.com
 www.pvaudio.com.br

Overal Diameter	4.52" (115 mm)
Overal Depth	2" (50 mm)
Mounting Bolt Circle	M6 x 2 3" (76.2 mm)
	M6 x 3 2.4" (61.1 mm)
Net Weight	3.16 lbs (1.44 kg)
Shipping Weight	3.50 lbs (1.58 kg)
Carton Dimensions W x L x H	5.31" x 5.0" x 3.15" (135 x 127 x 80 mm)