


PE4.8DA

User Manual

DSP Class D amplifier



PERFORMANCE

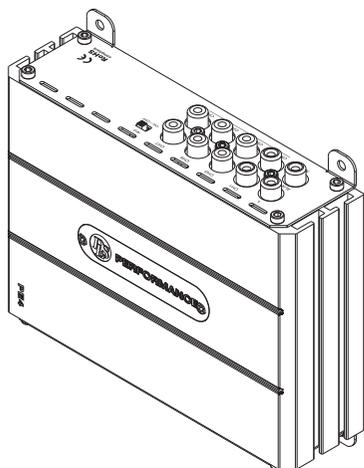

Welcome to DLS!

Thank you for buying a DLS Performance DSP amplifier. For us, it's all about the sound experience. We care deeply about sound and construction quality. In order for your experience to be as optimal as possible, it is important that you fully read this manual, preferably before you start your installation. Keep the manual in a safe and accessible place for future reference.

Your DSP amplifier must be installed correctly in order to work as intended. Make sure you have all necessary tools nearby before starting and that you are completely confident in how to proceed. If you feel the slightest uncertainty; feel free to take the help of an experienced installer or a car audio dealer.

Warranty

This DSP amplifier is covered by warranty, depending on the conditions in the country where it is sold. If the product is returned for service, please include the original dated receipt with the product.

DECLARATION OF CONFORMITY

DLS DSP amplifiers for vehicles are manufactured in accordance with the EU directive EEC 95/54 (72/245/ EEC) and are marked with the approval number. They are also marked in accordance with the WEEE-directive 2012/19/EC. The products are also produced in accordance with the EU RoHS directive 2015/863/EU.

DLS PERFORMANCE

PE4.8DA

Content

Welcome	2
Product overview	3
Features	4
Pre-installation	4
DSP amplifier location	4
Disconnect battery	4
Installation	4
Tools and materials	4
Power wiring	4-5
Audio wiring	6
Tuning software	7
General information	7
Advanced X-over management	8
31-band graphic equalizer	8-9
System control	10
Speaker assignment	10-11
Quick access tools	12
Additional features	12-13
Testing	14
Troubleshooting	14
Professional tips	15
Noise problems	15
Installation in trunk	15
Crimp connections	15
Speaker polarity check	15
Securing wires	15
Speaker & power wires	15
Specifications	16
Dimensions	17
Product markings	18

DLS products are engineered by DLS Sweden,
a part of:

Winn Scandinavia AB

Idrottsvägen 37 - SE-702 32 Örebro - Sweden


Tel: +46 19 20 67 65 - E-mail: info@dls.se

www.dls.se

Designed & Sound tuned in Sweden.



Product overview

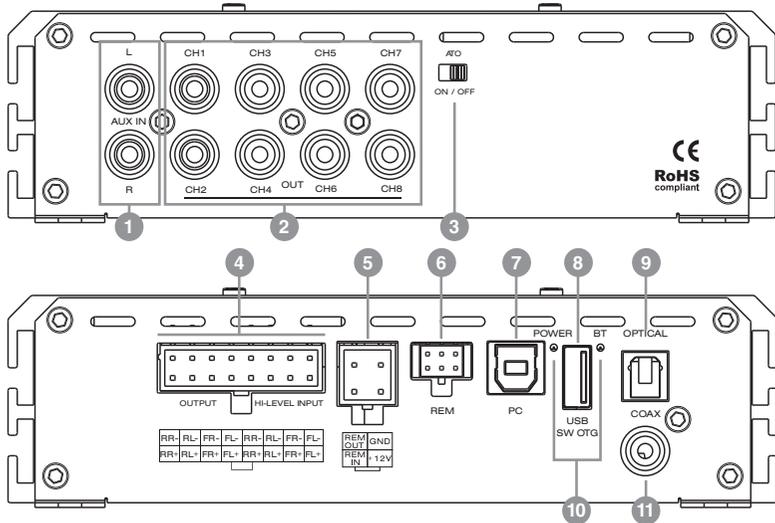

1	AUX IN RCA input for AUX audio sources, providing the ability to connect and play additional audio sources through the DSP amplifier for versatile sound options.
2	OUT 8-Channel DSP RCA Output. This output allows you to connect the DSP to external amplifiers or audio components, enabling multi-channel audio distribution for enhanced sound performance.
3	ATO/ACC Selects between Auto input and ACC input modes, offering flexibility in how the amplifier is triggered.
4	CONNECTIONS A) 4-CHANNEL SPEAKER OUTPUT: Connect your speakers to this output based on your sound system configuration for proper audio distribution. This layout allows for efficient setup and operation of the DLS PE4.8DA DSP amplifier, providing multiple input options and easy integration with your vehicle's audio system. B) 4-CHANNEL HIGH-LEVEL INPUT: This terminal connects to the enclosed cable harness. Ensure that only the included original cable is used to connect the amplifier to your head unit or car stereo.
5	POWER CONNECTIONS Connector for power input.
6	REMOTE Terminal for connecting an external remote controller (sold separately) to manage the DSP amplifier's functions remotely.
7	PC USB input designed for connecting a PC or laptop. This allows you to manage and configure the DSP settings of the amplifier using the DSP software.
8	USB-OTG USB port for connecting a USB flash drive or OTG audio source. The audio input can be switched via the software. Can also be used for software update. OTG cable is required.
9	OPTICAL INPUT Supports optical input for digital audio sources, providing high-quality sound transmission.
10	POWER & BT INDICATORS Indicator lights for Power and Bluetooth. Displays the operational status and Bluetooth connection of the DSP amplifier.
11	COAXIAL INPUT Supports coaxial input for digital audio sources, providing high-quality sound transmission.



Features

The DSP amplifier include the following features:

- Performance Advantage DSP Class D Amplifier
- Cirrus Logic DSP Chip 24Bit/192kHz Sample Rate
- Output: 8 RCA / 4x50W RMS (4Ω) / 4x50W RMS (2Ω)
- Input: 4 High-level / AUX / Optical / USB-OTG / BT 5.1
- Crossover: 8CH / 6dB – 48dB Adjustable Slopes
- EQ: GEQ / PEQ / 6CH 31-band -18dB - +12dB / 0.1dB Steps
- Time Alignment: 8CH 0-15ms / 0.021ms Steps
- Autosave Feature / 10 Memory Presets / Windows GUI
- Plug 'n' Play ISO-T Connection cable (120cm)

Pre-installation

DSP amplifier location

IMPORTANT!

Allow air circulation around the DSP amplifier.

The DLS Performance series of DSP amplifiers have a compact design that allows great flexibility in mounting. You can mount it under a seat or in the trunk.


When selecting a location, keep in mind that the amplifier generates heat. Choose a location where air can circulate freely around the DSP amplifier. Do not cover the DSP amplifier with carpets or hide behind trim panels. Do not mount the DSP amplifier in an inverted or upside-down position.

Check all locations and placements carefully before making any cuts, drilling any holes or making any connections.

Disconnect battery

Before you start the process of installing an amplifier, disconnect and secure the negative terminal from your battery/power source. This will prevent the risk of damaging yourself or the products.

Place the disconnected terminal in a secure and isolated location away from any possible connection belonging to the battery/power source system.



Installation

Tools and materials


TOOLS

- Insex, Flat and Phillips screwdrivers or bits.
- Wire cutter.
- Wire stripper.
- Electric drill with drill bits.
- Crimping tool.
- Digital multimeter or test lamp.
- Wire brush, scraper or a piece of an abrasive sheet to remove paint for a good ground connection.
- Grease to protect the ground connection from oxidation.

Power wiring

POWER TERMINAL (+12V)

Connect the **YELLOW** cable to +12Volt using a power cable between 15 AWG/1.5mm² and 11 AWG/4mm². Use a ring crimp terminal to securely connect the cable to the battery. For a 1.5mm² cable, a 15 Amp fuse is recommended. Position the fuse holder as close to the vehicle's battery positive terminal (+) as possible. This fuse is essential for protecting against cable fires!



Recommended fuse rating for PE4.8DA: 15A


NOTE! Max fuse value is always related to cable size & quality.

Be sure to use a rubber grommet or a plastic insulating tube wherever the cable passes through the firewall or other areas where it could become pinched. Secure the cables using wire ties to existing wiring in the engine compartment to prevent movement.



GROUND TERMINAL (GND)

Connect the *BLACK* ground cable to a solid, unpainted metal chassis ground for a reliable electrical connection. Use same size as +12Volt cable. A ground cable between 15 AWG/1.5mm² and 11 AWG/4mm² is recommended.



Clean the metal surface with a wire brush, scraper, or abrasive sheet to ensure a proper connection. Use one or two lock washers to secure the ground wire. After securing the connection, protect it with silicone grease or paint to prevent corrosion.

POWER LIGHT / PROTECT LIGHT



The power indicator (blue) is lit when the DSP amplifier is powered on.

The protect indicator (red) is lit when the DSP amplifier shuts down due to overheating or a short circuit (e.g., speaker failure). If the red protect LED light turns on, power off your audio system to reset the amplifier. If the red light remains on, contact your local dealer for further assistance.



REMOTE TERMINAL (REM)

When using an RCA cable for the signal input:



Connect the radio power antenna lead = remote turn on/off from the car stereo to the DSP amplifier remote REM IN connection (*RED* cable). This turns on the DSP amplifier whenever the car stereo is turned on. You can either use the built-in remote cable in the RCA cable itself or use a separate cable.

If there is no remote voltage available from the stereo, you must connect to the ignition key or any accessories fuse.

To avoid potential interference, we recommend using a separate remote wire and routing the RCA cable away from the remote wire, power cables, and speaker cables. This minimizes the chance of any disturbances entering the amplifier through the remote voltage.

When using high-level input, the amplifier will automatically turn on when the car stereo is switched on.

REM OUT connector (*BLUE* cable) will turn other devices/amplifiers on when the DSP amplifier have started.



Audio wiring


LOW-LEVEL INPUT WIRING

Inputs can either be low-level (from the RCA output of the car stereo) or high-level (from the car stereo speaker output). For optimal sound quality, low-level (RCA) input is preferred.

Important!

Use either the low-level or high-level input, do NOT use both at the same time.



For best results, use a pair of shielded stereo audio cables with RCA connectors. Most trunk-mounted amplifiers require an RCA cable that is approximately 20 feet (5-6 meters) in length.



HIGH-LEVEL INPUT WIRING

Most head units are pre-installed from the car factory and have no RCA output, in this case you can take the signal from the speaker output instead. Use either a separate remote cable or let the high-level signal automatically start the amplifier.

Connect left and right speaker wires coming from the car stereo to the high-level input as shown. You must connect both plus and minus as the inputs are balanced, connecting plus only gives lower level and bad sound quality. By changing the polarity of plus and minus, you can change the phase.

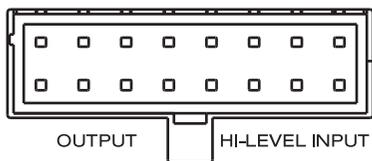


The high-level input connector wires follow the standard DIN-color coding. However, the car's wiring loom may use different color codes. When using high-level inputs, the amplifier's turn-on signal is derived from the high-level input itself, eliminating the need for a separate remote wire.

HARNESS CONNECTOR INPUT PINOUT

FL+ / CH1+	Front Left +	White	Connect left front speaker (+)
FL- / CH1-	Front Left -	White / Black	Connect left front speaker (-)
FR+ / CH2+	Front Right +	Grey	Connect right front speaker (+)
FR- / CH2-	Front Right -	Grey / Black	Connect right front speaker (-)
RL+ / CH3+	Rear Left +	Green	Connect left rear speaker (+)
RL- / CH3-	Rear Left -	Green / Black	Connect left rear speaker (-)
RR+ / CH4+	Rear Right +	Purple	Connect right rear speaker (+)
RR- / CH4-	Rear Right -	Purple / Black	Connect right rear speaker (-)

HIGH-LEVEL OUTPUT WIRING

The PE4.8DA features four internal amplification channels, which can be configured via the DSP software. These channels can be set as front and rear outputs for full-range speakers or configured for a two-way system with separate midrange and tweeter channels. The internal amplifier can also be turned OFF if its power output is not required.

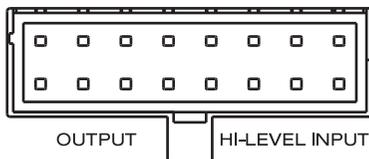

The high-level output connector wires follow the standard DIN color coding. However, the vehicles wiring loom may use different color codes.

HARNESS CONNECTOR OUTPUT PINOUT

FL+ / CH1+	Front Left +	White	Connect left front speaker (+)
FL- / CH1-	Front Left -	White / Black	Connect left front speaker (-)
FR+ / CH2+	Front Right +	Grey	Connect right front speaker (+)
FR- / CH2-	Front Right -	Grey / Black	Connect right front speaker (-)
RL+ / CH3+	Rear Left +	Green	Connect left rear speaker (+)
RL- / CH3-	Rear Left -	Green / Black	Connect left rear speaker (-)
RR+ / CH4+	Rear Right +	Purple	Connect right rear speaker (+)
RR- / CH4-	Rear Right -	Purple / Black	Connect right rear speaker (-)



Tuning software

General information

- Download the PC tuning software from the official DLS website www.dls.se.
- Connect the DSP amplifier to your computer using the supplied USB cable.

Once the software is launched, the main interface will open automatically, presenting all key functions for immediate access.



1. Functional and intuitive software

The software is designed for ease of use, with a clean, user-friendly interface. All key functions are organized in a single window for intuitive navigation and control.

2. Advanced x-over management

The crossover section enables precise control of crossover frequencies and filter slopes for each individual channel. Filter type and slope can be set independently for each channel, ensuring seamless frequency division between different speaker types.

3. System controls

Manage master volume and mute, select delay units (ms/cm/in), switch between EQ modes (PEQ/GEQ), and reset or restore EQ settings.

4. Speaker assignment

Select the vehicle speaker position to assign its corresponding DSP output channel.

5. Channel configuration

Each channel supports precise tuning of output level, polarity, and time alignment for accurate imaging. Channels can be linked to synchronize level, delay, and polarity across selected channels.

6. Quick adjustment

Reset the selected output, lock output to prevent changes, copy settings between left and right channels, and configure input mixing.

7. 31-band graphic equalizer

Choose between Parametric EQ (PEQ)—with adjustable gain, Q-factor, and frequency per band. Or a 31-band Graphic EQ (GEQ) with adjustable gain at fixed center frequencies. Real-time visual feedback aids precise tonal balance.



Advanced x-over management

The crossover section enables precise control of crossover frequencies and filter slopes for each individual channel. Filter type and slope can be set independently, ensuring seamless frequency division between different speaker types. The AUX output signal can be freely adjusted, enabling tailored signal routing and tuning flexibility.

- Both high-pass (HPF) & low-pass (LPF) settings can be adjusted independently. They can also be used together for a band-pass function.
- Users can select between filter types such as Bessel, Butterworth, and Linkwitz-Riley.
- Depending on the selected type, slope options range from 6 dB/oct to 48 dB/oct, allowing for fine-grained control over frequency separation between drivers (e.g., tweeters, midrange, subwoofers). This section is essential for achieving seamless integration and accurate phase response in multi-way audio systems.



31-band graphic equalizer

The EQ section offers full-spectrum tuning with adjustable gain, Q-factor, and frequency per band. Real-time visual feedback assists in achieving precise tonal balance. Users can switch between PEQ (Parametric EQ) and GEQ (Graphic EQ) modes depending on their tuning needs.

RESET EQ

Returns the 31-band EQ to Bypass (no filters applied). All EQ parameters—frequency, Q, and gain—are restored to their default values, providing a clean starting point for new tuning. (Only EQ parameters are affected.)



RESTORE EQ

Toggle between the current EQ settings and Bypass (pass-through). In Bypass, all band gains are set to 0 dB, while frequency and Q remain visible and unchanged — ideal for quick A/B comparisons. Toggling back restores the previously active EQ settings. (Presets are not altered unless you save.)





31-band graphic equalizer

SWITCHING EQ MODES

Click PEQ or GEQ to switch modes.

PARAMETRIC EQ (PEQ) MODE

In Parametric EQ (PEQ) mode, frequency and Q values can be adjusted for each band, providing advanced tuning flexibility.



GRAPHIC EQ (GEQ) MODE

In Graphic EQ (GEQ) mode, only the gain values can be adjusted, and the frequency and Q values are fixed for each band. These tools are useful for both professional installers and advanced users who want to quickly compare or reset their EQ settings.





System control

Manage core functions from a single panel:

- **Master Volume & Mute:** adjust overall level or mute instantly.
- **Delay Units:** choose ms / cm / in for time alignment.
- **EQ Mode:** toggle between 31-band PEQ and GEQ.
- **Reset / Restore EQ:** reset to defaults or toggle between active EQ and Bypass for quick A/B checks.



Speaker assignment



Assign output channels to your vehicle's speaker positions for correct routing and optimal acoustic performance.


CHANNEL CONFIGURATION

Each channel supports precise adjustment of output level, polarity, and time alignment (delay) for accurate imaging. Channels can also be linked to synchronize level, delay, and polarity across selected outputs.



In the Channel configuration section, you can configure key parameters for each individual channel:

- **Speaker assignment:** Specify the speaker type (full-range, tweeter, midrange, woofer, subwoofer) and the channel location (Left/Right, Front/Rear, Center or Subwoofer) for the selected output.
- **Volume Control:** Adjust the output level for each channel.
- **Mute:** The sound from the specific channels mutes instantly.
- **Polarity Settings:** Set phase orientation 0° or 180° to ensure proper summation and imaging across drivers.
- **Link Settings:** Link channels for mirrored adjustments (ideal for stereo or symmetrical layouts).
- **Time Delay:** Set delay in ms / cm / in to align arrival times at the listening position.

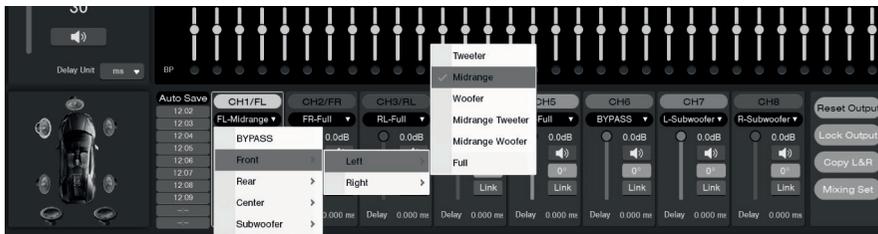

These adjustments are essential for accurate imaging, coherent staging, and stable spatial balance in the vehicle.



Speaker assignment

TIME ALIGNMENT

Time alignment ensures that sound from all speakers reaches the listening position simultaneously, improving imaging and coherence. Select the farthest speaker as the reference (set to 0 ms / cm / in) and add delay to all closer speakers so their arrivals coincide at the listening position.



HOW TO TIME ALIGN

1. Measure distances

Measure from your listening position (reference point) to each connected speaker.

2. Choose the reference (farthest speaker)

Identify the farthest speaker and set its delay to 0 ms (or 0 cm) in the DSP software. This is your reference.

3. Calculate distance offsets

For every other speaker, compute: $\text{Offset(cm)} = \text{Distance farthest} - \text{Distance speaker}$

Example: If the farthest speaker is 150 cm away and others are at 70/80/90/100/120 cm:

- $150 - 70 = 80$ cm
- $150 - 80 = 70$ cm
- $150 - 90 = 60$ cm
- $150 - 100 = 50$ cm
- $150 - 120 = 30$ cm

4. Convert distance to delay

Sound travels ≈ 34 cm/ms (≈ 343 m/s at -20 °C). $\text{Delay (ms)} = \text{Offset (cm)} \div 34$:

- $80 \div 34 = 2.35$ ms
- $70 \div 34 = 2.06$ ms
- $60 \div 34 = 1.76$ ms
- $50 \div 34 = 1.47$ ms
- $30 \div 34 = 0.88$ ms

5. Enter delay values

Input the calculated delays for each speaker. Either directly in ms or as cm/in. The Delay Unit can be changed in the system control area.

NOTE!

After applying the calculated values, listen to the result and fine-tune by ear for optimal imaging and center focus.



Quick access tools



Use the PC software quick-access tools to:

- Resetting the EQ to factory defaults.
- Restoring pass-through mode.
- Bypassing or locking output channels.
- Linking EQ settings across multiple channels.

Additional features

PC CONNECTION AND INPUT SELECTION

The main menu allows you to manage the following system-level functions:


- System connection to PC.
- Select input sources.
- Handle presets including saving and loading of files.
- Firmware updates and factory resets are also located here.
- Optimized amplifier output
- Switching the internal amplifier ON or OFF

OPTIMIZED AMPLIFIER DESIGN

Optimized amplifier output design delivers 50 watts of clean power with both 4 Ohm and 2 Ohm speakers. Select 4 Ohm or 2 Ohm operation depending on the type of speakers connected to the amplifier.

INTERNAL AMPLIFIER

The internal amplifier can also be turned OFF if its power output is not required. Select ON or OFF depending on system configuration.

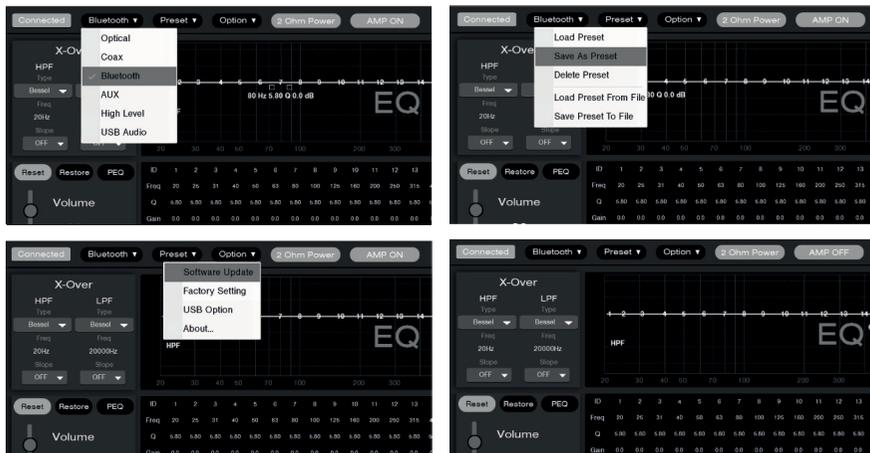



Additional features

MIXING SET ADJUSTMENTS

The Mixing Set menu enables individual adjustments per selected input source (e.g., High-Level or Optical). These adjustments ensure optimal signal balance before DSP processing. With the combination of intuitive software and advanced tuning capabilities, the DLS PE4.8DA provides unmatched flexibility and precision for demanding in-car audio environments.

The screenshot displays the 'Mixing Set' menu in the PE4.8DA software. At the top, it shows 'Connected', 'Bluetooth', 'Preset', 'Option', '3 Chm Power', and 'AMP ON'. Below this is an 'EQ Bypass' section with a frequency spectrum graph. The main area is the 'Mixing Set' menu, which shows input sources 'Bluetooth L' and 'Bluetooth R' with volume sliders and bypass buttons. Below are eight channel settings (CH1/FL to CH8) with gain sliders, delay buttons, and delay values. A car diagram is visible on the left side of the channel settings.

AUTO SAVE

Press the Auto Save button and the current settings will be saved automatically (1). Auto-saved settings are stored as .spf files in the AutoSave folder inside the DLS PE4.8DA software directory. They can be loaded at any time from the Preset drop-down list (2).


The screenshot displays the 'Auto Save' menu in the PE4.8DA software. At the top, it shows 'Connected', 'Bluetooth', 'Preset', 'Option', '3 Chm Power', and 'AMP ON'. Below this is an 'EQ Bypass' section with a frequency spectrum graph. The main area is the 'Auto Save' menu, which shows a list of saved presets (12:22 to 12:21) and buttons for 'Auto Save', 'Load Preset', 'Save As Preset', 'Delete Preset', 'Load Preset From File', and 'Save Preset To File'. A car diagram is visible on the left side of the Auto Save menu.



Testing

RECONNECT BATTERY

When wiring is complete, re-connect the battery negative terminal.



TEST POWER WIRING

1. Turn on the head unit but do not turn up the volume. The amplifier power light should come on. If not, check the remote, high-level input cables and +12 Volt wires. Check the ground connection.
2. Turn up the head unit volume slightly. All speakers should operate. If not, check wiring connections at amplifier and speakers.

TEST SPEAKER CONNECTIONS

Make sure the speakers are connected right. Use the balance control on the head unit to make sure right channel is on right speaker etc. If speakers don't play at all, one or both speaker wires may be disconnected.

Troubleshooting

If any issues occur during installation or later, this guide may help you diagnose and resolve it.

THE DSP AMPLIFIER IS DEAD

1. Check power lead, ground and remote connections at the amplifier using a multi meter.
2. Check the battery terminal connections.
3. Check the power lead fuse or circuit breaker. If fuse damage continues, inspect the power lead for short circuits.
4. Check the amplifier protection fuses. Are these broken change to new ones with the same value. If short circuiting continues, contact your local DLS dealer. A fault may be in the amplifier.
5. To start the amplifier requires a remote voltage of 9-15 volt. Check the voltage with a multi meter.

DSP AMPLIFIER PROTECTION FUSE BLOWS AT LOW VOLUME

1. One or more speaker cables are shorted. Make an insulation test with a multi meter. The cables must not have a connection to earth.

DSP AMPLIFIER PROTECTION FUSE BLOWS AT LOW VOLUME

The amplifier is overheating due to inadequate ventilation. Check so the mounting position is clear:

1. Move the amplifier to a location with better ventilation.
2. Install one or two fans to cool down the heat-sink.
3. Overheating can also be caused by impedance load below the level permitted.

NO OUTPUT FROM ONE OR MORE SPEAKERS

1. No source is connected.
2. high-level input cables are not connected properly.
3. Start the DSP software to see if:
4. Mute function is activated.
5. Check so the input channels are selected correctly.
6. Check all speaker cable connections.
7. Check signal lead plugs and cables.



Professional tips

Noise problems

WHINING NOISE VARYING WITH ENGINE REVOLUTIONS

Do this:

1. Rewire the power supply (12 V) to source unit direct from battery.
2. Rewire ground wire from source unit to clean position on chassis.
3. Check all power connections to ensure that they are clean and tight.
4. Check quality of system ground connection.
5. Install a power capacitor with connections as close as possible to the alternator. This bypasses the noise at source and eliminates many issues with noise problems. In cars with a jump start connection, this provides a convenient connection point for the capacitor.

CONSTANT WHINING NOISE

Do this:

1. Ensure that all equipment has a common ground point.
2. Check quality of earth strap connection from battery negative terminal to chassis.
3. Disconnect signal cables from the DSP amplifier to see if noise disappears. If so the leads are picking up noise. Test this by laying a new cable over the seats and reconnecting to the DSP amplifier. If the noise does not return, reroute original cable away from source of interference. If noise remains regardless of cable position, try to use so RCA signal cables of Coaxial type.

Installation in trunk

When installing the DSP amplifier in the trunk, run the power wires along the same path as the other vehicle wiring. Many cars have insulated channels for wiring. You will have to remove the door sill trim and the carpet.

Crimp connections

Purchase crimp connectors and crimping tool. Connectors are color coded.

1. Strip 1/4 inch (6mm) of insulation from the wire
2. Insert into connector
3. Crimp tightly


Speaker polarity check

All speakers in a car audio system should be connected in phase (the same polarity). This ensures that all speaker cones move in the same direction. Speakers that are out of phase can result in lack of bass, and a poor stereo soundstage.

CHECKING POLARITY:

Hold the - connection of the speaker wire to the - terminal of a 1,5 Volt flashlight battery. Tap the + wire on to the + terminal of the battery, and observe the movement of the cone. The cone should move outwards when the wire touches the battery, and inwards when the battery is removed. If it is the other way around, the speaker has been connected backwards and it must be removed and connected correctly.

If your system also has a subwoofer connected through a passive 6 or 12 dB crossover, try to connect this with various polarity and judge what sounds best. The phase shift in passive crossovers sometimes makes it necessary to change polarity.

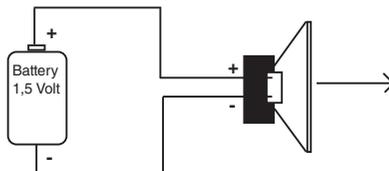

NOTE! Tweeters can not be tested this way, double check the connections instead.

Securing wires

Use wire ties to bundle together when possible. (But never bundle speaker wires or signal cables together with power wires).



Speaker & power wires

Avoid running speaker and power wires alongside each other, as power cables can induce unwanted "siren" sounds in the speakers. For optimal performance, run speaker and power wires on opposite sides of the vehicle to minimize interference.







Specifications

PE4.8DA	
Amplifier class	D
High-level speaker input channels	4
High-level speaker output channels	4
Power output RMS in 2 ohm	4x50 Watt
Power output RMS in 4 ohm	4x50 Watt
Internal Amplifier switchable ON/OFF	Yes
DSP RCA output channels	8
Signal to noise ratio, A-weighted	>100dB
Frequency response	20 Hz – 20 kHz
High input impedance	10 ohm
High input sensitivity	4 – 10V
Low input sensitivity	0.5 – 2.5V
DSP Processor	Cirrus Logic 24Bit/192kHz Sample Rate
Crossover type	Bessel / Butterworth / Linkwitz-Riley.
Crossover slope	8CH / 6dB – 48dB Adjustable Slopes
EQ	GEQ / PEQ / 8CH 31-band -18dB - +12dB / 0.1dB Steps
Time Alignment	8CH 0-15ms / 0.021ms Steps
Recommended Fuse Rating	15A
PC Connection	USB 2.0
Software / PC requirements	Microsoft Windows (32/64bit) XP, Vista, Windows 7, Windows 8, Windows 10, Windows 11
Dimensions HxWxD(mm)	165 x 142 x 44 mm (including installation feet)
Dimensions HxWxD(inch)	6,49 x 5,59 x 1,73 inches (including installation feet)
Weight	0,95 kg



Dimensions

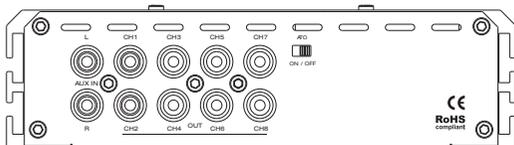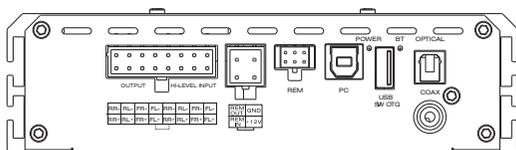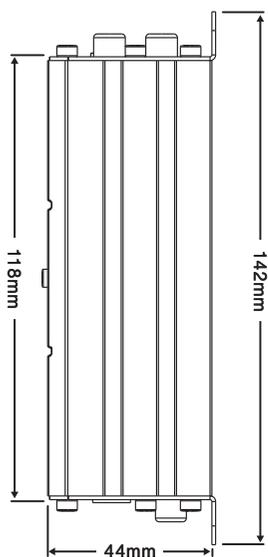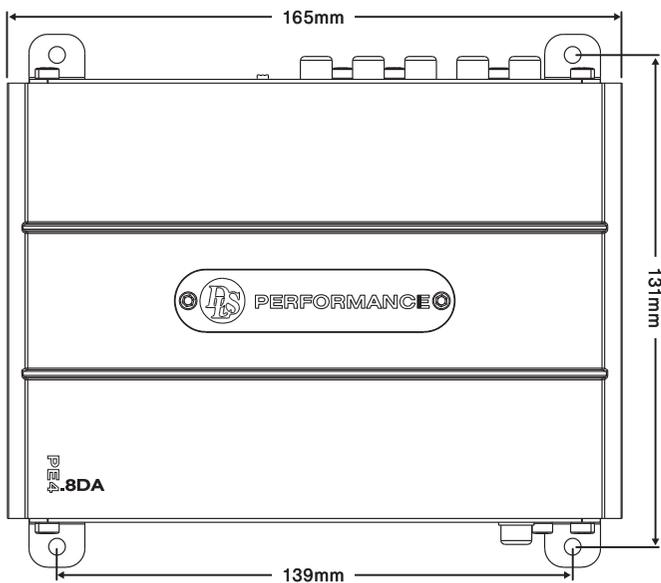



Product markings



The crossed-out wheellie bin symbol means that the product, literature and packaging included must be taken to separate collection at the end of their working life. Do not dispose of these products as unsorted municipal waste: take them for recycling. For info on your nearest recycling point, check with your local waste authority.



This product has been granted with the CE certification mark to show that the product follows the health, safety, and environmental protection standards for products sold within the European Economic Area (EEA).



DLS products complies with the relevant provisions of the RoHS Directive for the European Union. In common with all Electrical and Electronic Equipment (EEE) the product should not be disposed of as household waste. Alternative arrangements may apply in other jurisdictions.



DLS is a global partner of the European Mobile Media Association, an organisation that focus on promoting the custom made mobile media installations to consumers.

We follow a policy of continuous advancement in development. For this reason all or part of specifications & designs may be changed without prior notice. We reserve for possible typos, factual or numeric errors that may have been printed on any products, package designs, user manuals and/or other included accessories.



PERFORMANCE