





Adaptiv Mini Fitting & User Guide CAM-AU6-AD

WWW.ADAPTIV-MUI.TIMFDIA.COM



Adaptiv Mini

Adaptiv Mini allows HDMI and Camera input to the OEM screen. Includes removable dynamic parking guidelines



This plug and play Mini interface adds HDMI to connect your Apple or Android device, allowing you to mirror your smartphone display on the vehicle's original screen. Inputs for front and rear aftermarket cameras also come as standard with the Mini.

Application

Audi Q2 2017-UP Audi A3 (8V) 2013-UP Audi A4 (B9) 2015-UP

For vehicles with 5.8" or 7" display and OEM AUX input only.

Kit Includes

Adaptiv Interface Vehicle Harness

Prior to installation


Read the manual prior to installation. Technical knowledge is necessary for installation. The place of installation must be free of moisture and away from heat sources. Connects2 cannot be held responsible for the installation of this product.

Technical Support


Connects2 want to provide a fast and suitable resolution should you encounter any technical issues. With this in mind, when contacting Connects2, try to provide as much Information as possible. This will speed up the process and help us to help you.

Please use our dedicated online technical support centre: support.connects2.com



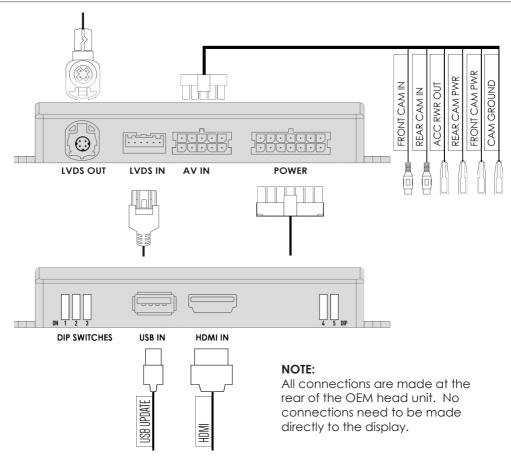


DIP SWITCH SETTINGS




DIP 1

If the vehicle has OEM reverse camera (ON: YES OFF: NO)




DIP₃

If the vehicle has aftermarket reverse camera (ON: YES OFF: NO)



DIP 2

If the vehicle has aftermarket front camera (ON: YES OFF:NO)



DIP 4

A3 5.8" - ON | 7" - OFF A4/Q2 5.8" - ON | 7" - OFF DIP 5

A3 5.8" - OFF | 7" - OFF A4/Q2 5.8" - ON | 7" - ON



Button Configuration



HDMI Access

Select Aux In from the OEM source menu. Hold **MENU** Button for 2 seconds to switch between OEM screen and Adaptiv Mini HDMI screen



Video In Motion Warning - 10mph

Hold BACK Button to disable the video in motion warning message

Rear and Front Camera Access

From either HDMI mode or OEM mode

- 1. Select reverse gear for reverse camera
- Deselect reverse gear will go to after market front camera (if DIP 2 ON)
 To cancel front camera drive over 10 MPH or hold BACK Button for 2 seconds







Front Camera Access

Hold $\bf BACK$ Button for 2 seconds to enter the front camera screen (if DIP 2 is ON) Press $\bf BACK$ Button to exit front camera

Dynamic Parking Guidelines

Set to On by default when reversing camera image is active. To toggle off/on, press and hold the **MENU** Button for two seconds when reversing camera image is active.

View Version Number

Hold **MENU** Button for 8 seconds to enter firmware information screen